

Features

- High power handling up to 150W
- Wide band operation
- High isolation within operational band
- Low Insertion Loss
- Stable performance over temperature
- LMDS multi-carrier operation
- High peak to average handling capability
- All specifications can be modified upon request




Parameters		Min.	Typ.	Max.	Units
Frequency Range		0.8		2.5	GHz
Nominal Coupling			3		dB
Insertion Loss			0.2	0.3	dB
Isolation		22	24		dB
Amplitude Imbalance			±0.4	±0.5	dB
Phase Imbalance			±3	±4	deg
VSWR			1.15	1.2	: 1
Power Rating	Forward Power	150			W
	Peak Power	1 (10% Duty Cycle, 1 us Pulse Width)			KW
Impedance		50			Ohms
Weight		7.9 Max.			Ounces
Input / Output Connectors		N-Female			
Material		Aluminum			
Finish		Gray paint			

Environmental Specifications


Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25gRMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave,3 axis both directions

Outline Drawing:


All Dimensions in mm (inches)
 Outline Tolerance ±0.5 (0.02)
 Mounting Holes Tolerance ±0.2(0.008)

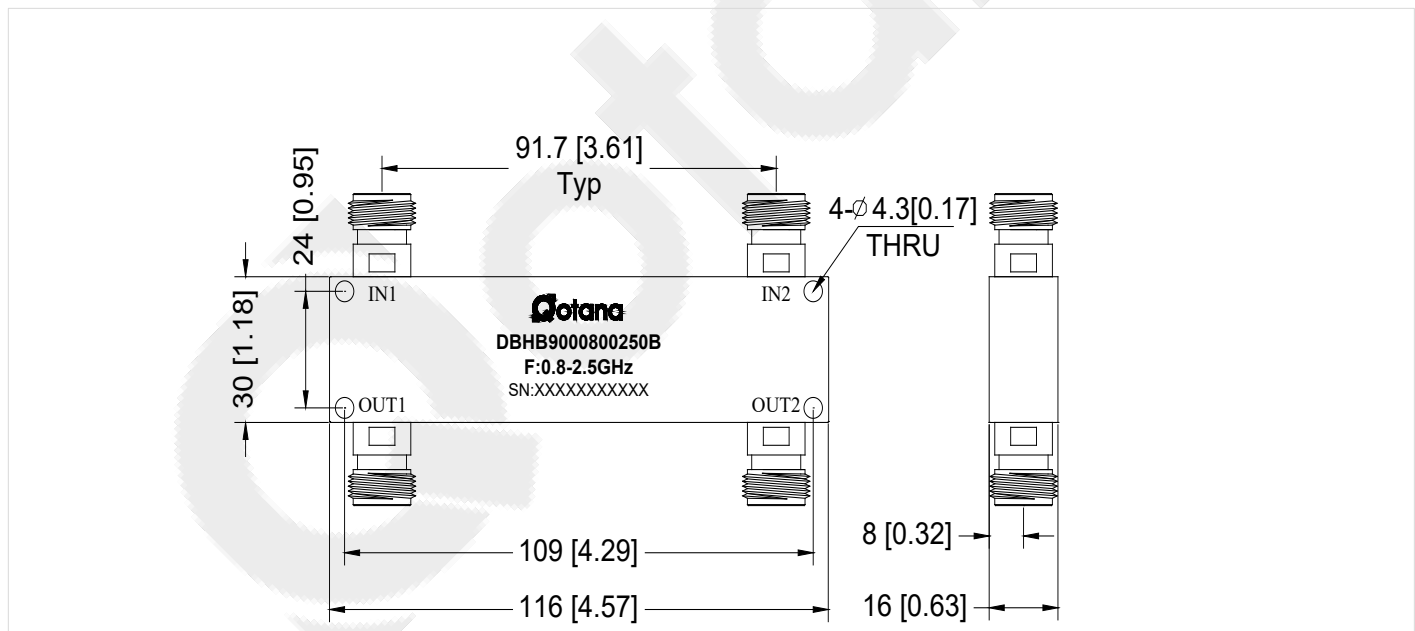


Schematic:

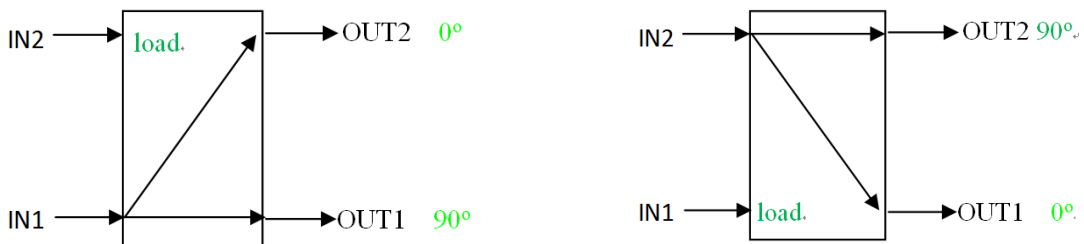


Loss & Amplitude Imbalance

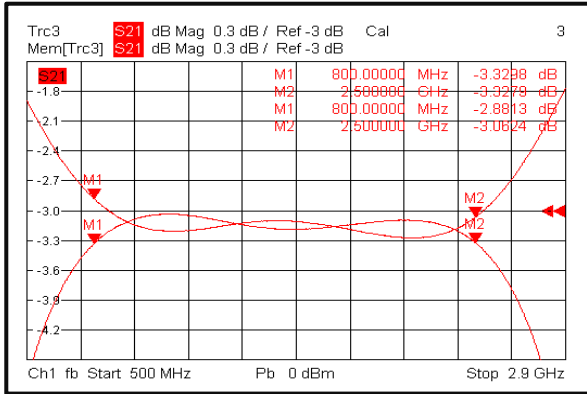


Input VSWR

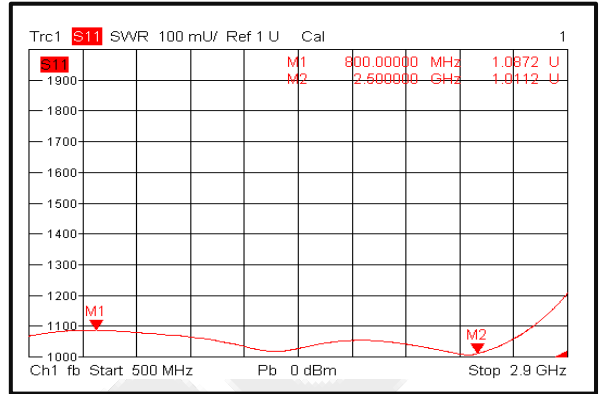


Output VSWR

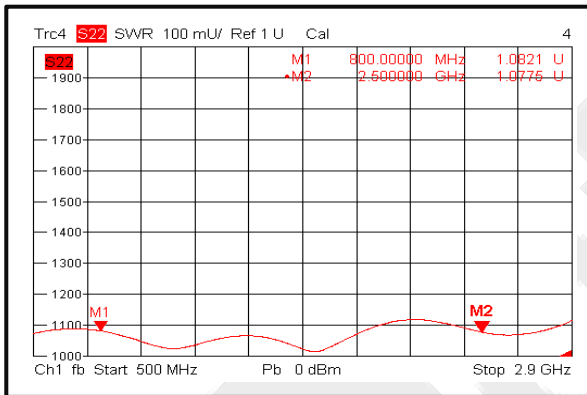


Phase Imbalance

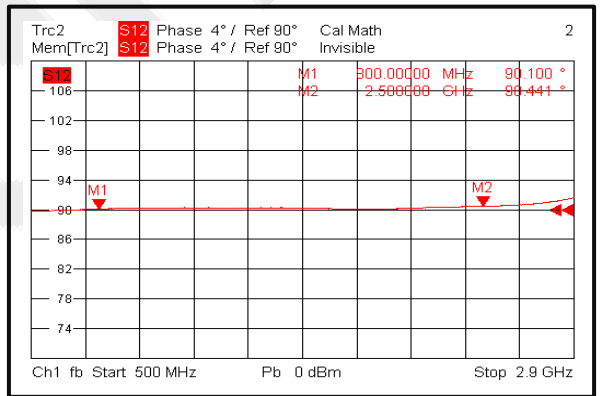


Loss & Amplitude Imbalance

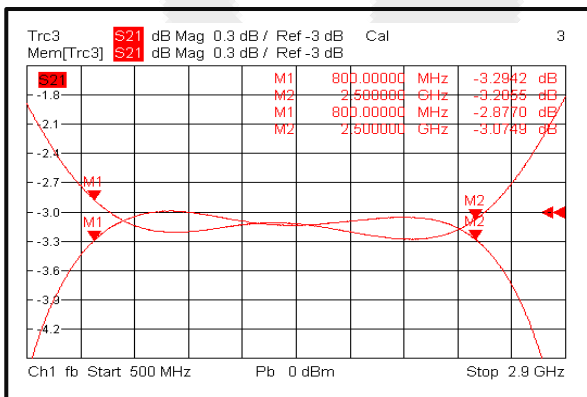


Input VSWR

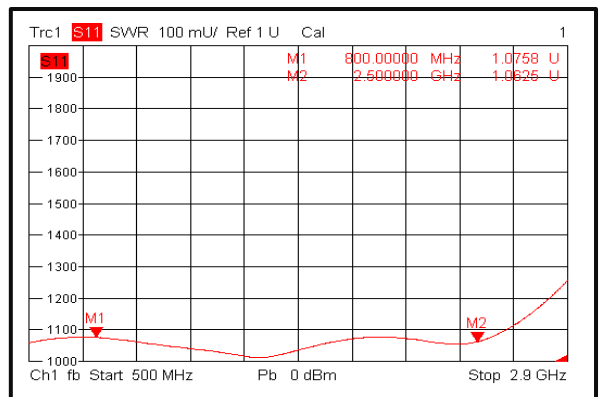


Output VSWR

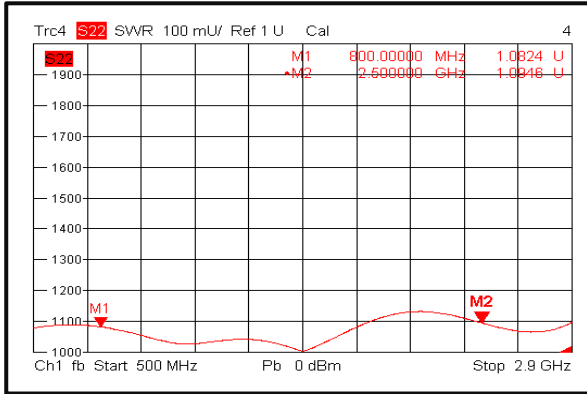

Phase Imbalance

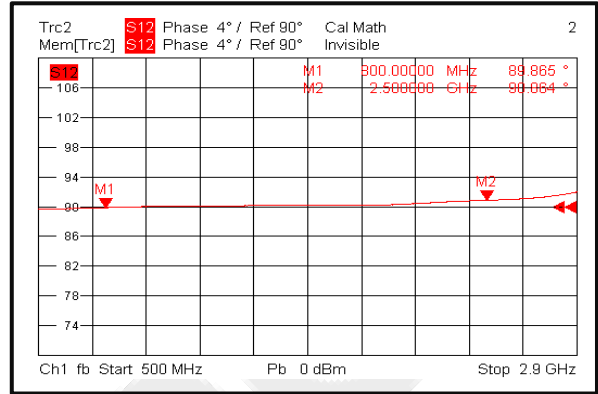

Isolation

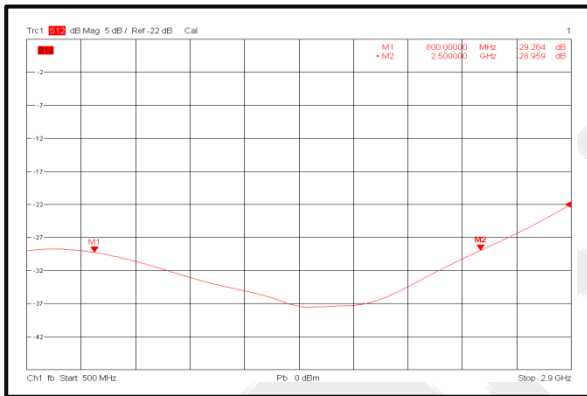

QOTANA TECHNOLOGIES and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.qotana.com for additional data sheets and product information.