


## Features

- Gain: 30dB Typical
- Output power + 28dBm typical
- High P1dB: + 25dBm Full Band
- Supply Voltage: + 12V



## Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT  
Fiber Optics

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	0.02		0.08	0.08		12	12		22	GHz
Gain	24	30		26	30		25	27		dB
Gain Flatness		±2.0	±3.0		±2.0	±2.5		±0.8	±1.5	dB
Gain Variation Over Temperature (-40°C ~ +85°C)		±1.0			±1.2			±1.5		dB
Input VSWR		1.4	1.5		1.4	1.5		1.5	1.8	: 1
Output VSWR		2			1.8			1.5		: 1
Output 1dB Compression Point (P1dB)		26		26	28		25	27		dBm
Saturated Output Power (Psat)		28			30			29		dBm
Output Third Order Intercept (IP3)		35			38			35		dBm
Supply Current (Vcc=+12V)		600	800		600	800		600	800	mA
Isolation S12		-40			-65			-60		dB

Weight	2.12ounces	Impedance	50 ohms
Input / Output Connectors	SMA-Female	Material	Aluminum
Finish	Gold plated	Package Sealing	Hermetically Sealed (Laser Sealed)

**Absolute Maximum Ratings**

Operating Voltage	+15.5V@+25°C
RF Input Power (RFIN)	+6dBm@+25°C

**Biassing Up Procedure**

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing

**Power OFF Procedure**

Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


**Environmental Specifications**

Operational Temperature	-40°C~+85°C
Storage Temperature	-55°C~+125°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions


**Outline Drawing:**

All Dimensions in mm (inches)


Heat Sink required during operation(Sold Separately)

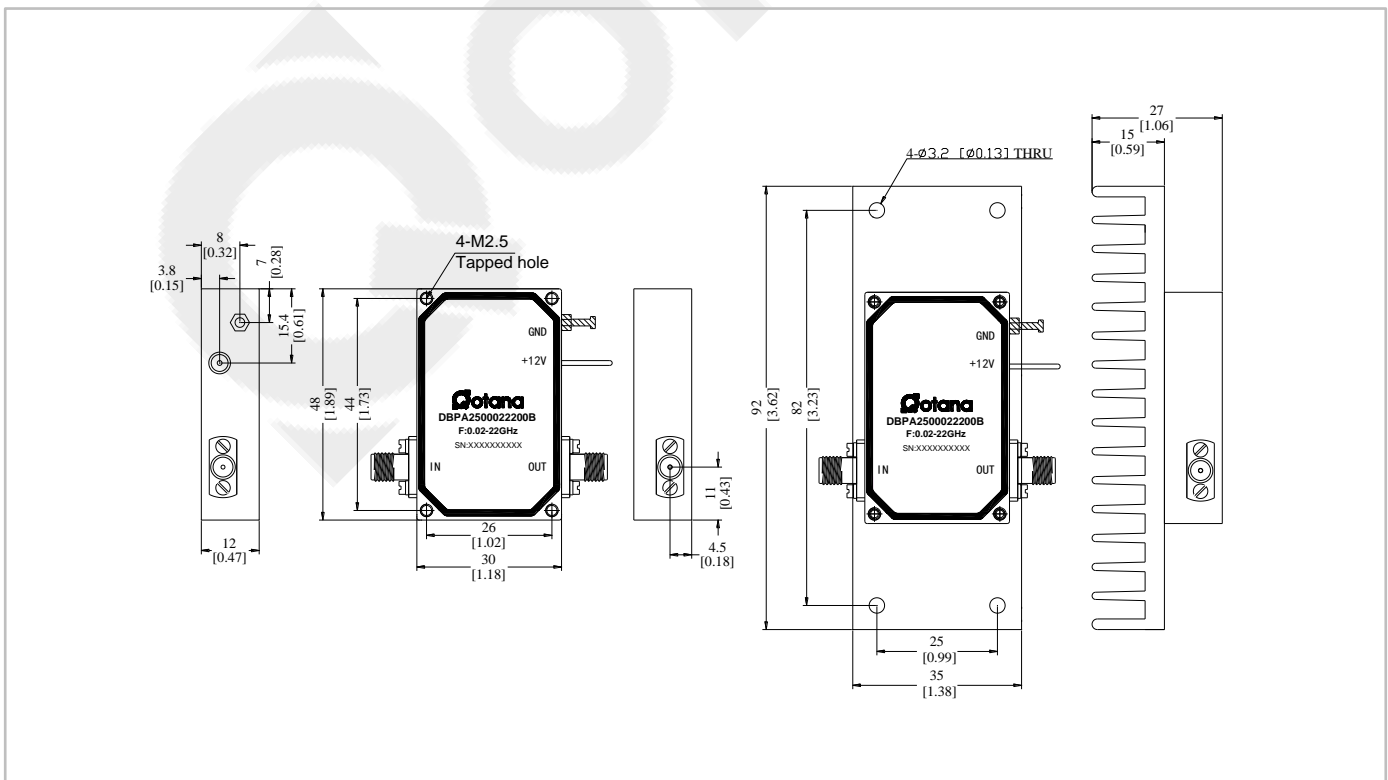


**Gain**

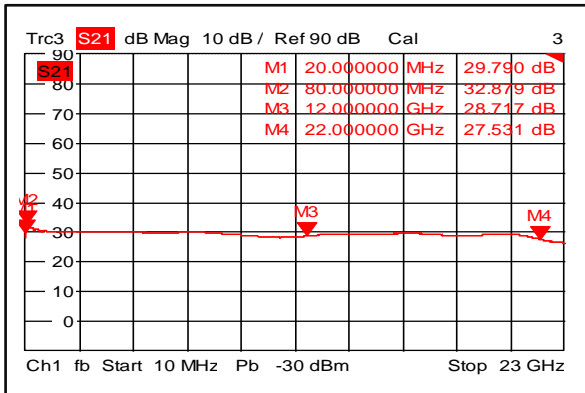


**Input VSWR**

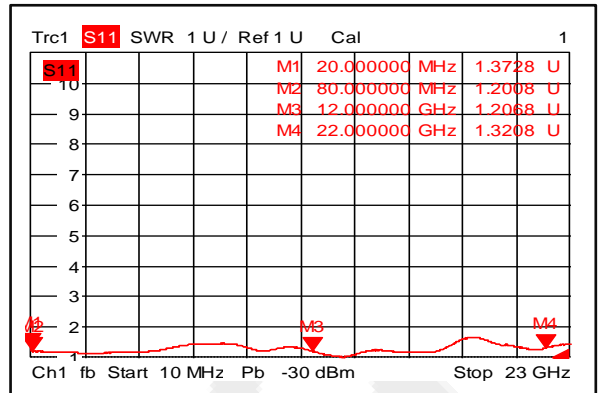


**Output VSWR**

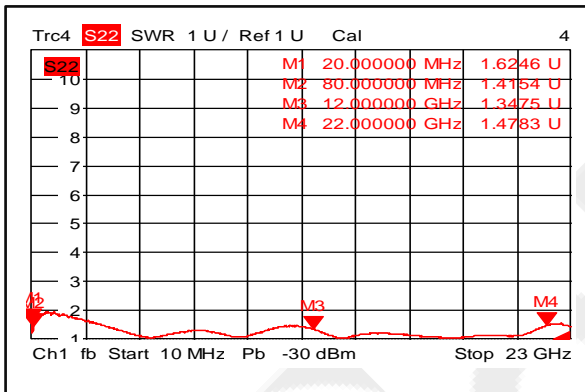


**Isolation**

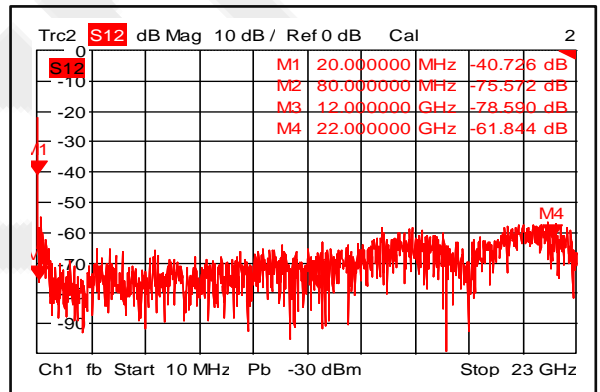


**Gain vs. Output Power**

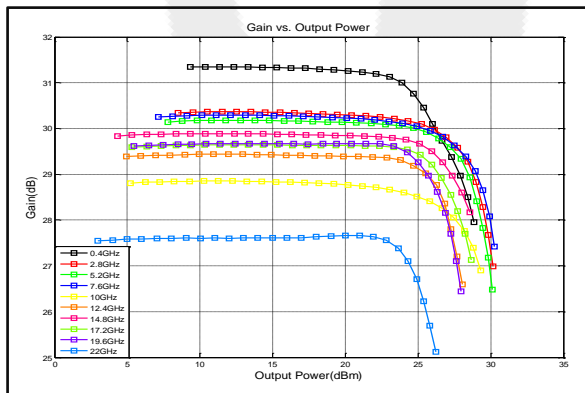


**P1dB vs. Frequency**

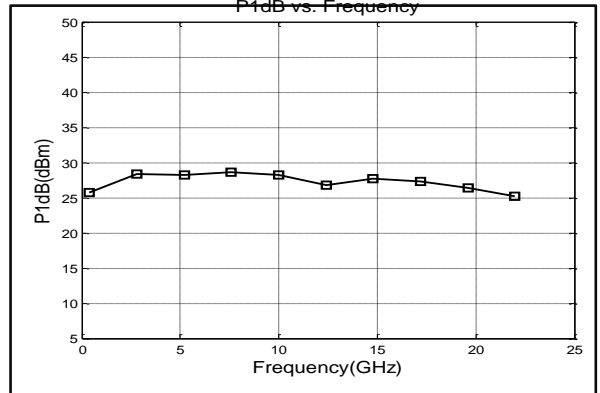


**Output Third Order Intercept (IP3)**

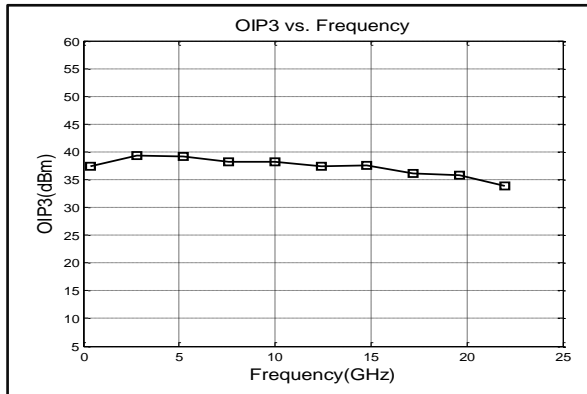


**Current vs. Output Power**

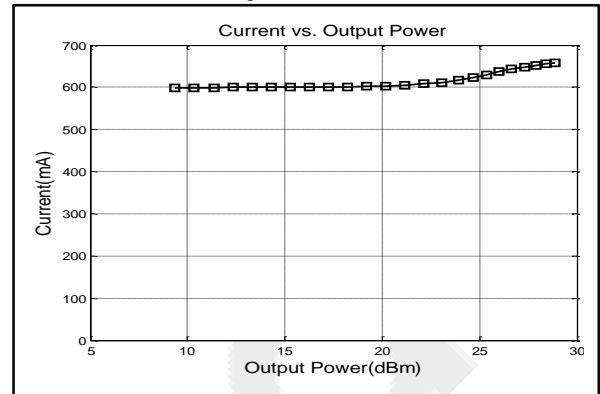


**2nd Harmonic Wave Output Power**

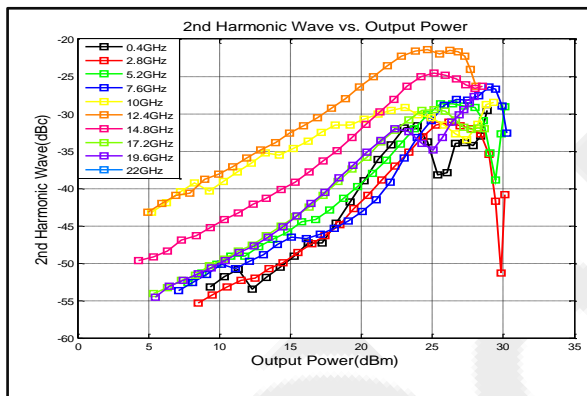

**3rd Harmonic Wave Output Power**

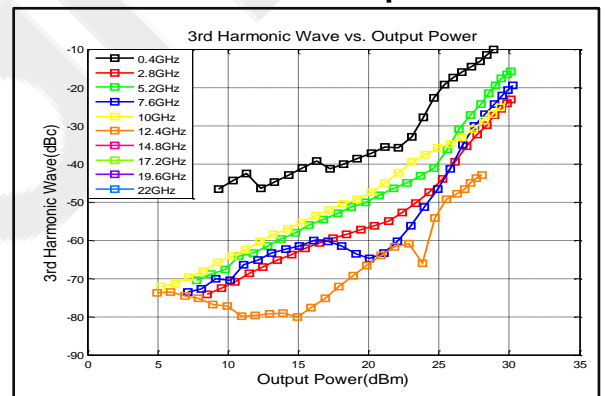

**4th Harmonic Wave Output Power**

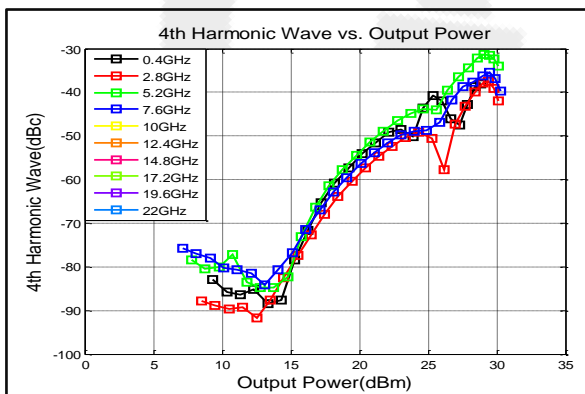

QOTANA TECHNOLOGIES and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit [www.qotana.com](http://www.qotana.com) for additional data sheets and product information.